



ECONOMIC SERIES VERTICAL PANEL SAW MACHINE

PRODUCT USER MANUAL



ORDER NOW



More information
www.goldstarcnc.us



More information
(786) 400-0910

ABOUT US

GOLDSTARCNC, based in Miami, Florida, has been leading the industry in woodworking innovations for over two decades and continues challenge the industry with new advancements.

At GOLDSTARCNC, our mission is to delivery quality nation wide as we are involved in many community outreach programs in wich we offer our time, support, products and services.

Phone: (786)-400-0910

Address: 9900 nw 80 ave unit 4c
hialeah gardens fl 33016.



ECONOMIC SERIES **VPS-MACHINE**



Specifications

Standard Electric	220V 50HZ 3 PHASES (Please contact for other requirement)
Motor	Makita - Bosch - Einhell
Maximum Main Saw	5300rpm
Maximum Main Saw	235
Cutting Depth	1.65 in (Please contact to up to 2.36 in)
Dust Extraction Capacity	Min. 1765.73 CFM

ECONOMIC SERIES **VPS-MACHINE**

Vertical Panel Saw Machine



Optimize your cuts with the **GoldStar CNC Economic Series vertical panel saws**. This machine offers unparalleled efficiency and precision, ideal for workshops seeking productivity and impeccable results thanks to its manual support profiles, dual locking system, and high-precision digital readout.



STANDARD FEATURES

MANUEL SUPPORT PROFILES


In horizontal position, in case the saw corresponds to the plastic profile, the plastic profiles are moved up and down with the metal handle on the right rear. Plastic profiles and attitude places should be cleaned daily after cutting.



MANUEL VERTICAL LOCK


Vertical Panel sizing should have a vertical lock strictly. In vertical cuts, it is opened and closed up and down with black rubber handle. As the black handle is moved up and down, the vertical lock is fixed from below and above. It is used manually.

STANDARD FEATURES

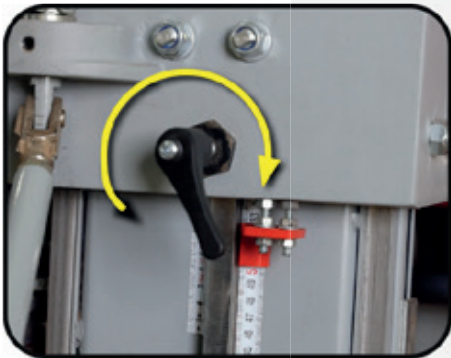


MANUEL HORIZONTAL LOCK

The horizontal lock should be strictly in vertical panel saws. Induces the tolerance in the horizontal position. After the measurement is taken, the black handle is turned and the saw is locked and the cut is made.

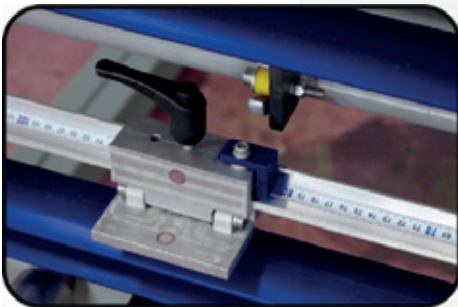

REDOUT COMPONENTS

The meter component in the horizontal consists from aluminum. When the dimension is taken, the cap with a herm opens. It should be kept closed when not in use, and the saw may come across. Linear encoder can be added in digital redout option. After cuts it must be cleaned with an air gun.

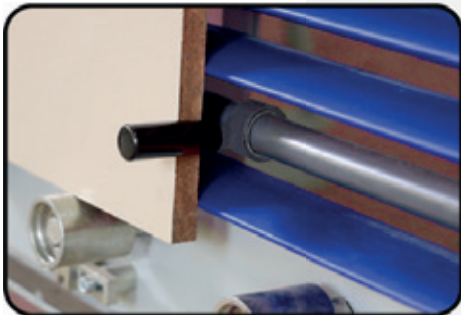

HANDLE OF COMPRESSING

It is used for horizontal cutting. After the dimension is taken in horizontal cutting, the material is imposed on the meter component and the compression is made with the metal handle on the right side. Ensures that the material does not slip. It prevents tolerance.




MIDDLE SHELF

Middle shelf, small parts are for cutting only in vertical cutting. When the middle shelf is open, horizontal cutting should not be done. When the middle shelf is used, it is opened or closed by the right back side with metal handle. Middle shelf parts can be replaced when needed.

ADDITIONAL FEATURES


PNEUMATIC MOVABLE ROLLER SYSTEM

During loading the material to machine, 4 wheels are lifted into the air with the help of the pedal. Thus, the material is moved easily on the machine. It will be enough to move with the help of fingers. The pedal should be used slowly. 4 rollers are made up of eccentric metals. A pedal should be cleaned after cuts for at least 20 days.

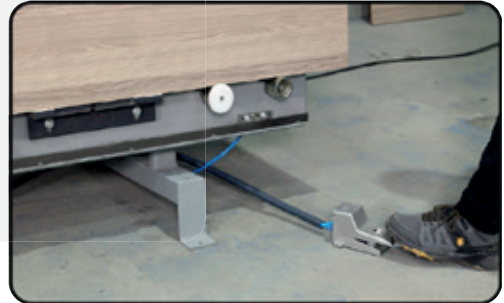

DIGITAL REDOUT

The digital redout is designed to get comfortable and easy measurement. Can be used in 0,0000 to 5 digits at most. Consists of 2 parts in vertical and horizontal position. After cutting, magnetic tapes and meter locations need to be cleaned with an air gun. It should be done 1 time per day. When any problems are encountered in digital redouts, please try to solve them by contacting the supplier.

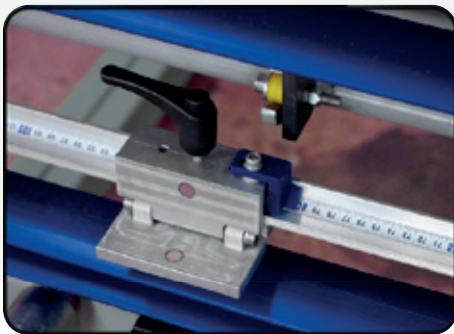


LINEAR RAIL

It is produced from Hard-Steel. Provides to move more easier, taking balance easier and long life.



MATERIAL LOADING CAR

It provides to load the material from stock area to the machine. Normally, two workers have possibility to load heavy materials to the machine, but it is designed to load materials easily by one worker.

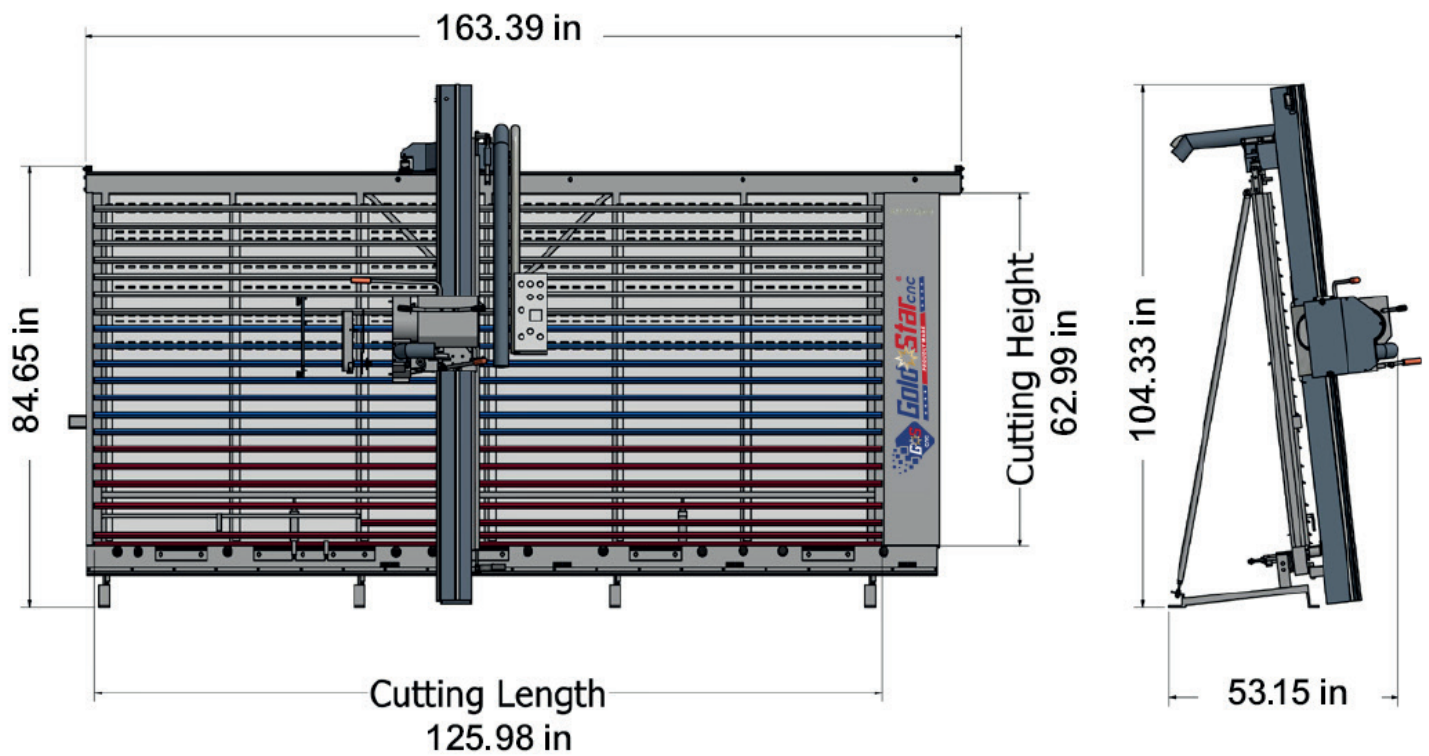

Please contact for other dimensions





More information
www.goldstarcnc.us



More information
(786) 400-0910

